



KIRLOSKAR DIESEL ENGINES

Engine Model: 4R1040TA

No. of	Bore x Stroke	Displacement (cc)	Gross Power Output Rating as per ISO3046 at 1800 RPM bhp (kW)			ower Rating tor at 0.8 pf
Cyls.	(mm)	(33)	Prime	Standby	Prime	Standby
4	105 x 120	4160	112 bhp (82.4kW)	123.2 bhp (90.7 kW)	87 kVA	95.7 kVA

Features -

- Designed for heavy duty applications
- Extremely reliable
- All service points like dipstick, lube oil filling, lube oil filter, fuel pump, injectors are on one side which is the cooler side. This adds to operator comfort.
- Lower operating cost
- Easy maintenance higher uptime
- Superior design standards that minimize power deration even at high ambient temperatures.
- Winner of the frost & Sullivan Voice of Customer Award in the "Best Bang for Buck" category in the Indian Generating sets Market.

Ratings Definition:

Standby Ratings: These ratings are applicable for supplying continuous electrical power (at variable load) in the event of a utility power failure. No overload is permitted on these ratings. The alternator on this model is peak continuous rated (as defined in ISO 8528-3)

Prime Rating: These ratings are applicable for supplying continuous electrical power (at variable load) in lieu of commercial purchased power. There is no limitation to the annual hours of operation and this model can supply 10% overload power for 1 hour in 12 hours.

Continuous Rating: These ratings are applicable for supplying power continuously to a constant load upto the full output rating for unlimited hours. No sustained overload capability is available for this rating.



Engine Technical Data:

Physical Data			
Engine Make	Kirloskar		
Engine Model	4R1040TA		
Number of cylinders	4		
Configuration	Inline		
Туре	Four stroke		
Bore x Stroke (mm)	105 x 120		
Displacement (cc)	4160		
Cooling	Liquid cooled		
Aspiration	Turbocharged		
Compression Ratio	18:1		
Starting Arrangement	12V Electric		

Fuel System				
Type of fuel filter	Two stage spin on type			
Governor Type	Mechanical			
Class of Governing	ISO 3046 Class A1 & ISO 8528-5, Class G2			
Fuel pump type	Inline			
Fuel pump make	MICO - BOSCH			
Recommended Fuel	Class A2,	High spee	ed diesel	
Fuel consumption Load		100%	75%	50%
+5% tolerance L/hr		20.8	15.6	11.2
Fuel consumption readings are based on diesel fuel with a specific gravity of 0.85 and confirming to BS 2869, Class A2)				

Air System			
Air Filter Type	Dry type replaceable element		
Exhaust gas flow rate (kg / hr)	460		
Combustion fresh air flow (m³/hr)	462		
Radiator air flow (m³/hr)	12600		
Total fresh air required (m³/hr)	13062		


Lubrication System			
Type of lube oil filter	Full flow spin on type		
Oil to be used	SAE15W40 API : CI4		
Oil pump type	Through G-rotor gear pump		
Lub oil sump capacity (lit)	11		
Lube oil consumption	0.3% of fuel consumption		

Cooling System		
Cooling system capacity (lit)	24	
Water pump type	Centrifugal	
Radiator fan load (hp)	4.5	

Electrical System			
Starting Arrangement	12V Electric		
Starter	12V Electric		
Recommended starter battery rating	120 Amp-hr		
Battery charging alternator	Engine mounted 12V battery charger		
Battery charger amps	35		

Engine Dimensional Details:



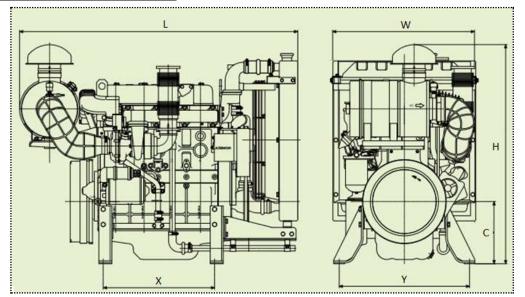

Dimensions in mm					
L	L W H C X Y				
1464	900	1167	285	513.5	600

Weight Details		
Engine weight without radiator Gross / Net (kg)	670 / 585	
Radiator and accessories weight Gross / Net (kg)	77 / 60	

Coupling		
Flywheel Suitable for SAE 11.5" disc		
Housing	SAE3	
Coupling disc	Not supplied	

KIRLOSKAR OIL ENGINES LIMITED

Head Office: Laxmanrao Kirloskar Road, Khadki, Pune 411 003, India. Tel.: +91 20 2581 0341 / 534 Fax: +91 20 2581 3208 Website: www.koel.co.in



International business offices KIRLOSKAR DMCC

JBC-5, Cluster W, Jumeirah Lake Towers, P.O.Box 37745, Dubai. U.A.E.

Tel.: +971 4 443 8591 Fax: +971 4 441 4532

Email: enquiry@kirloskar.ae Website: www.kirloskarib.com

JOBURG INDUSTRIAL TRADING S.A.(Pty) LTD.

Unit B1, The Stables Business Park, Cnr of Third Avenue & Second Road, Limbro Park, Modderfontein, Johannesburg.

KIRLOSKAR KENYA LTD.

KOEL AMERICAS CORPORATION

33300 Egypt Lane, Suite C300, Magnolia, TEXAS – 77354, United States Tel.: +1 346 248 5777 Email: Vinay.Kulkarni@koelamerica.com

VIETNAM REPRESENTATIVE OFFICE

Suite 1331A, 13th Floor, Level One Saigon, mPlaza Saigon, No. 39 Le Duan Street, Ben Nghe Ward, District 1, Ho Chi Minh City,

Kirloskar Oil Engines Limited reserved the right to change the design or specifications without notice

^{(*} Please refer to the respective rating GA drawing)